


FRL Accessories

Shut-Off Valves

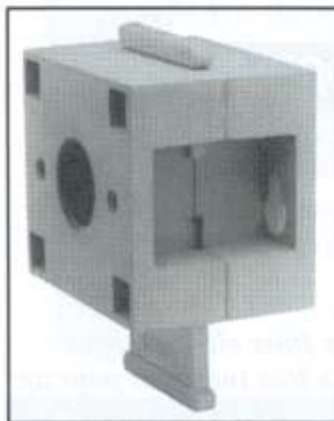

- Relieves Downstream Pressure when closed
- Security Holes provided for Lock-Out Feature
- Modular Construction
- 150 psig Maximum Pressure

Standard Shut-Off Valves	
Item	Port Size
28-206	1/4" NPT
28-308	3/8" NPT
28-414	1/2" NPT (Compact Body)
28-410	1/2" NPT
28-512	3/4" NPT

Miniature Shut-Off Valves	
Item	Port Size
28-102	1/8" NPT
28-204	1/4" NPT

Note: Miniature Shut-Off Valves can only be used with Miniature FRL's.

How to order
or for information:

1.888.426.8111



Pressure Gauges



Pressure Switches

Pressure Switch		
Item	Connection	psig
28-900	1/8" NPT	4-20
28-905	1/8" NPT	14-150
28-910	1/4" NPT	4-20
28-915	1/4" NPT	14-150



Specifications:

- Contact Rating: 4A @ 250VAC
- Protection: IP65, Terminals IP00
- Maximum Pressure 300 psig
- Temperature Range: 0°F to 190°F
- Hysteresis Adjustment: 15%
- Maximum Voltage: 250VAC / 200DC
- Tamper Resistant Adjustment
- Can be wired as Normally Open or Normally Closed

Centre Back Mount Pressure Gauges

Item	Connection	Face	Range
21-100	1/8" NPT	1.5"	0psi - 160psi
21-110	1/8" NPT	1.5"	0psi - 60psi
21-120	1/8" NPT	1.5"	0psi - 30psi
21-200	1/4" NPT	2"	0psi - 160psi
21-210	1/4" NPT	2"	0psi - 60psi
21-220	1/4" NPT	2"	0psi - 30psi

Pressure Gauges are included with the following:

- FRL Combinations
- Filter-Regulator Units
- Pressure Regulators