


Solenoid Valves

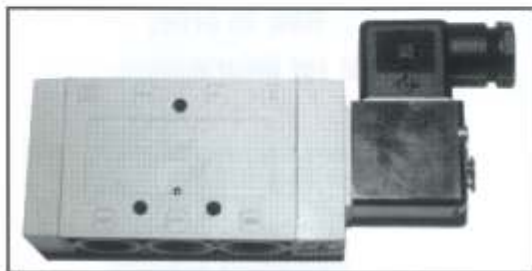

145 psig Maximum Pressure

- High Flow Capacity
- Body Ported
- Can be run with or without lubrication
- Locking Manual Override Standard

**How to order
or for information:**

1.888.426.8111



Single Solenoid - Spring Return Valve				
Item	Port Size	Voltage	Cv	SCFM*
71-100	1/8" NPT	120V (AC)	1.0	46
71-105	1/8" NPT	24V (DC)	1.0	46
71-210	1/4" NPT	120V (AC)	1.0	46
71-215	1/4" NPT	24V (DC)	1.0	46
71-320	3/8" NPT	120V (AC)	1.7	79
71-325	3/8" NPT	24V (DC)	1.7	79

Minimum Inlet Pressure: 15 psig

* SCFM at 80 psig



Double Solenoid Valve				
Item	Port Size	Voltage	Cv	SCFM*
71-130	1/8" NPT	120V (AC)	1.0	46
71-135	1/8" NPT	24V (DC)	1.0	46
71-240	1/4" NPT	120V (AC)	1.0	46
71-245	1/4" NPT	24V (DC)	1.0	46
71-350	3/8" NPT	120V (AC)	1.7	79
71-355	3/8" NPT	24V (DC)	1.7	79

Minimum Inlet Pressure: 15 psig

* SCFM at 80 psig

Manual Valves



145 psig Maximum Pressure

- High Flow Capacity
- Compact Design
- Body Ported
- Can be run with or without lubrication



Manual Valve - Spring Handle			
Item	Port Size	Cv	SCFM*
72-242	1/4" NPT	1.7	79
72-344	3/8" NPT	1.7	79

The spring handle will return the valve to the original position when released.



Manual Valve - Detent Handle			
Item	Port Size	Cv	SCFM*
72-248	1/4" NPT	1.7	79
72-350	3/8" NPT	1.7	79

The Detent handle will hold the valve in position when released.

* SCFM at 80 psig